


Features:

- 125 Mbps to 3.125 Gbps duplex data links
- Compliant to 802.3z Ethernet, Fiber Channel (1x/2x/3x), Infiniband SDR, sFPDP, FCAV and ARINC818
- 1550nm DFB laser transmitter and PIN Receiver
- Class 1 Laser Int. Safety Std. IEC-825 compliant
- Up to 80 km on 9/125 μm SMF
- 1x10 surface mount connector, standard
- 1x12 surface mount connector option providing Digital Diagnostics
- Rugged LC connector housing including screw-mounted OSAs
- -40 to +85 C operating temperature
- Option for RoHS 6/6 compliant and lead free per Directive 2011/65/EU
- Single +3.3V power supply
- AC-Coupled Transmitter & Receiver Data
- Conformal coating options for harsh environment use
- COTSWORKS RJs are fully tested over the operating temperature range



The RJ-3G-ZX is ideal for harsh environment connectivity because of its low cost, availability, and wide operating parameters

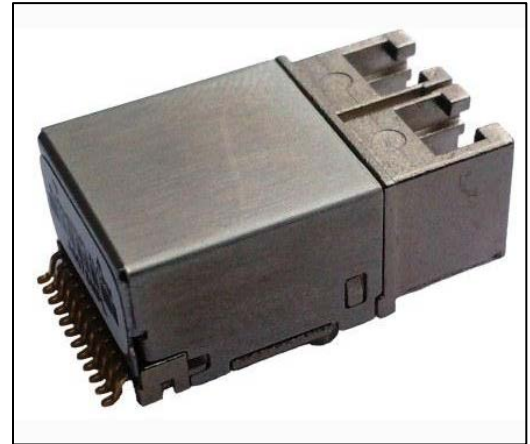

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Note
Maximum Supply Voltage	V _{CC}	-0.5	4.5	V	
Storage Temperature	T _{sto}	-50	105	°C	
Case Operating Temperature	T _{OP}	-40	85	°C	
Relative Humidity	RH	0	95	%	Based on conformal coating
Lead Soldering Temperature			260	°C	10 seconds on leads only
Conformal Coating		0.8	1.2	mil	See ruggedization notes

Notes:

- 1) RJ transceivers may be water washed. The process must be followed by an 80°C bake for one hour to ensure the drying of any water inside the shell.
- 2) The components should not undergo Reflow Soldering under any circumstances.


General Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Data Rate	BR	0.125		3.125	Gb/s	

Electrical Specifications (T_{OP} = -40 to 85°C, V_{CC} = 3.14 to 3.47 Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Supply Voltage	V _{CC}	3.14	3.3	3.47	V	
Total Supply Current	I _{CC}			375	mA	
Module Power Dissipation	P _{DIS}			1.3	W	
Transmitter						
Supply Current	I _{CC} TX			275	mA	
Input differential impedance	R _{IN}		100		Ω	
TX Differential Input Voltage	V _{DTX}	200		2400	mV	
Transmit Disable Voltage Threshold	V _D	2.0		V _{CC}	V	
Transmit Enable Voltage Threshold	V _{EN}	0		0.8	V	
Receiver						
Supply Current	I _{CC} RX			100	mA	
RX Differential Output Voltage	V _{DRX}	600		900	mV	
Total Contributed Jitter (p-p)	RXΔTJ			0.4	UI	FCPI-4 (δ _R - γ _R)
Data Output Rise/Fall Time	t _r /t _f			130	ps	20% - 80%
Signal Detect Assert Voltage	SD _{norm}	2.4		V _{CC}	V	
Signal Detect De-Assert	SD _{fault}	0		0.4	V	

Pin Configuration

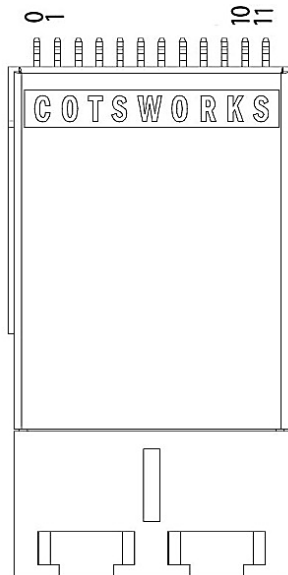

PIN #	Symbol	Description	Logic Family
GP	GP	Grounding Posts Connect to chassis ground	N/A
0	SCL	I2C Clock (1)(2)	I2C
1	TD+	Transmitter DATA In +	LVPECL
2	V _{EET}	Transmitter Signal Ground	N/A
3	TD-	Transmitter DATA In -	LVPECL
4	V _{CCT}	Transmitter Power Supply	N/A
5	SD	Signal Detect output Satisfactory Optical Input: Logic "1" Output Fault Condition: Logic "0" Output	LVTTTL
6	T _{DIS}	Transmit Disable input Logic 1 = Disable Optical Output Logic 0 = Enable Optical Output Internal 10K ohm pull-down (enable)	LVTTTL
7	RD+	Receiver DATA Out +	CML
8	V _{CCR}	Receiver Power Supply	N/A
9	RD-	Receiver DATA Out -	CML
10	V _{EER}	Receiver Signal Ground	N/A
11	SDA	I2C Data (1)(2)	I2C

Notes:

- 1) Pins 0 and 11 are optional pins for the I2C bus that is used for Digital Diagnostics per SFF-8472.
- 2) Pins 1-10 are the only pins on a transceiver without DDMI.

Optical Characteristics (T_{OP} = -40 to 85°C, V_{CC} = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Output Optical Power (9/125 SMF)	P _{OUT}	-1		5	dBm	(1)
Optical Wavelength	λ	1541	1550	1558	nm	(2)
Spectral Width	σ			1	nm	(2)
Extinction Ratio	ER	8.2			dB	(3)
Optical Rise/Fall Time	t _r /t _f			130	ps	(3)(4) 20% - 80%
Relative Intensity Noise	RIN			-120	dB/Hz	(3) FCPI-4 (δ _R - γ _R)
Total Jitter Contribution (p-p)	TJ _{TX}			0.4	UI	
Receiver						
Receiver Sensitivity@ 1.25Gbps	RX _{SENS1}			-22	dBm	(1)(4)(5)
Receiver Sensitivity@ 3.125Gbps	RX _{SENS2}			-16	dBm	
Overload	RX _{MAX}	0			dBm	
Optical Center Wavelength	λ _c	1270		1620	nm	
Return Loss	RL	12			dB	
Signal Detect Assert	P _{SDA}			-20	dBm	(1)(5)
Signal Detect De-Assert	P _{SDD}	-32			dBm	(1)(5)
Signal Detect Hysteresis	P _{SDA} - P _{SDD}	1			dB	


NOTES:

- 1) Measured using a broad area detector optical power meter.
- 2) Measured using an optical spectrum analyzer.
- 3) Measured using a high speed oscilloscope.
- 4) Measured using a BERT set running PRBS 2⁷-1 at 3.125Gbps.
- 5) Measured using a 9μm single-mode variable optical attenuator.

Digital Diagnostics Information

The COTSWORKS RJ module is available with optional signal pins for a 2-wire bus required in order to access digital diagnostics compliant to SFF 8472 multi-source agreement. The transceiver pinout (including those pins required for 2-wire communication to access the digital diagnostics) appears on the previous page.


Application Schematics

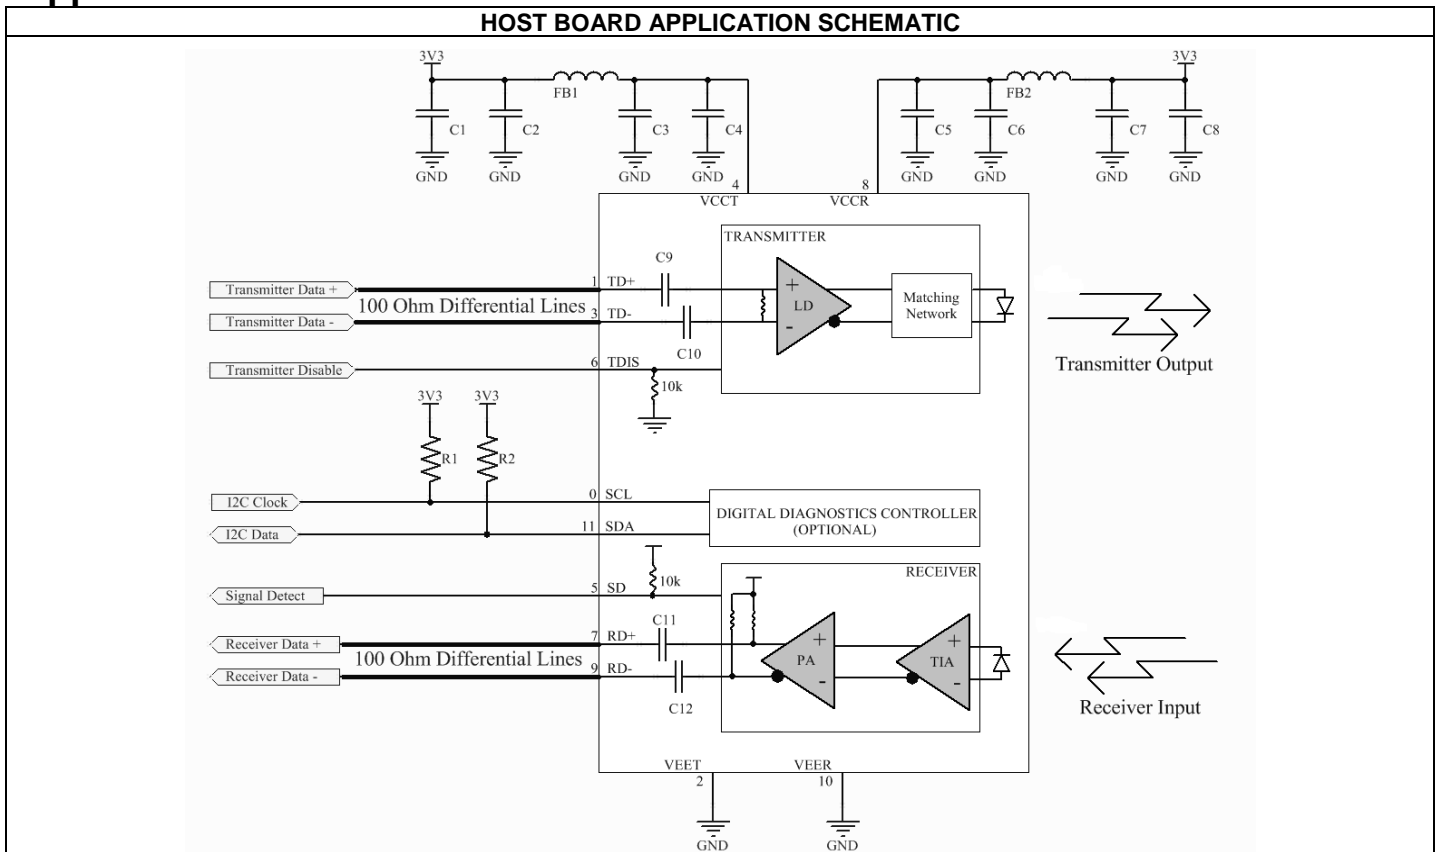

- Notes:**
- Recommend host routes separate supply voltages and filtering for RJ-module transmitter and receiver as shown in the schematic above
 - FB1/FB2 ferrite bead for power supply noise suppression; Murata BLM18KG601SN1, 0603, 600Ω @ 100MHz, 1300mA
 - C1/C4/C5/C8 bulk capacitance; Murata GRM21BR61C106KE15L, 0805, 10μF, 16V
 - C2/C3/C6/C7 de-coupling capacitors; Murata GRM155R71C104KA88D, 0402, 0.1μF, 16V
 - R1/R2 2-wire bus pull-up resistors required on host for implementing optional digital diagnostics; 4.7kΩ to 10kΩ
 - Recommend screw or solder posts be connected to chassis ground if available otherwise they should be tied to local signal ground
 - For host with LVPECL electrical interface contact COTSWORKS' applications engineering

TRANSMITTER EQUIVALENT INPUT CIRCUIT	RECEIVER EQUIVALENT OUTPUT CIRCUIT
<ul style="list-style-type: none"> • C9/C10 0.1μF internal input data coupling capacitors • R3 internal 100Ω input differential termination • Transmitter electrical input is CML compatible 	<ul style="list-style-type: none"> • C11/C12 are 0.1μF output data coupling capacitors • R4/R5 are 50Ω pull-up resistors to Vcc • Receiver electrical output is CML compatible


PCB Design Guidelines

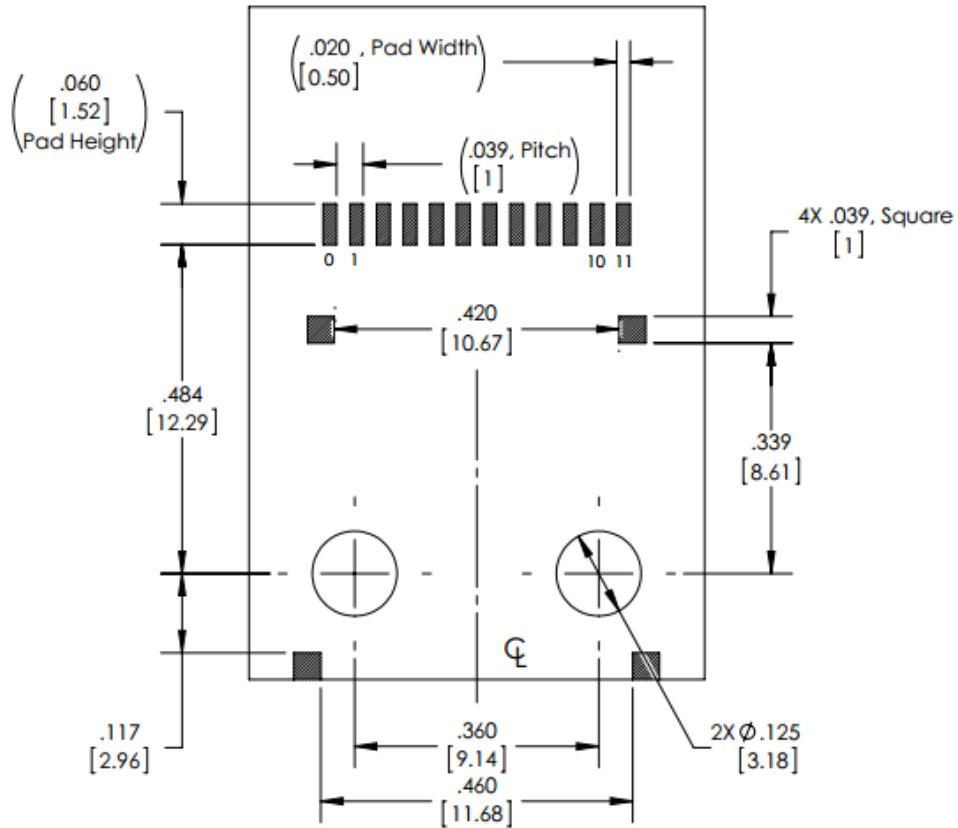


Notes:

- 1) Pads 0 and 11 are the 2-wire bus signal pin pads for the digital diagnostics option


Panel Cutout

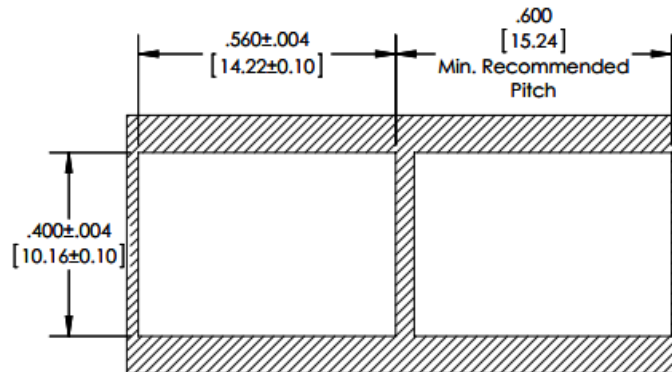


Screw Post Mechanical Dimensions

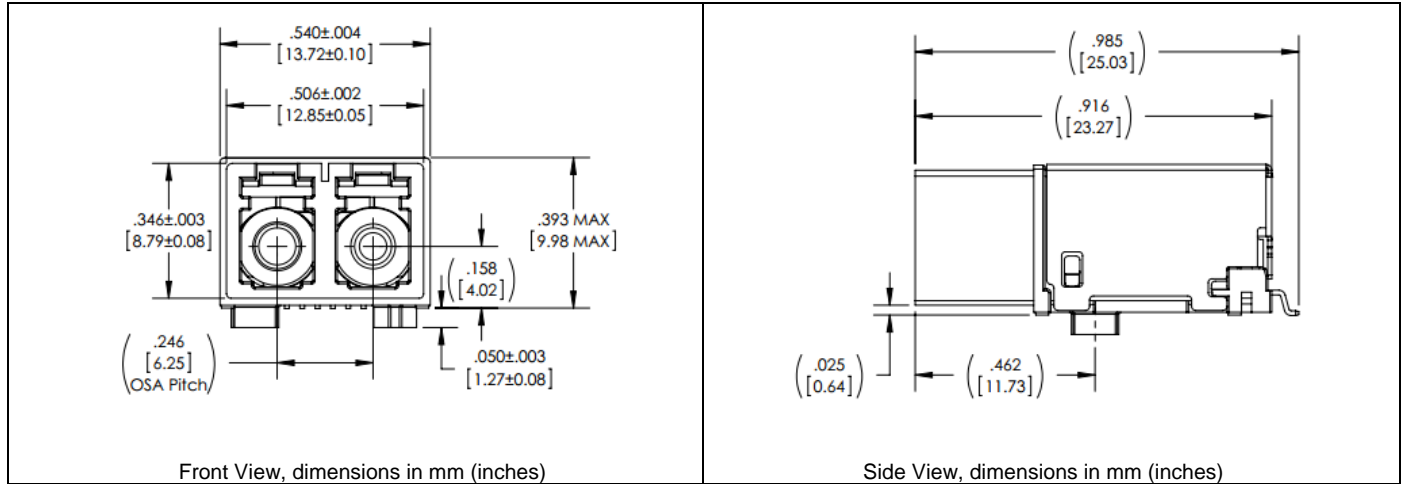

Solder Post Mechanical Dimensions

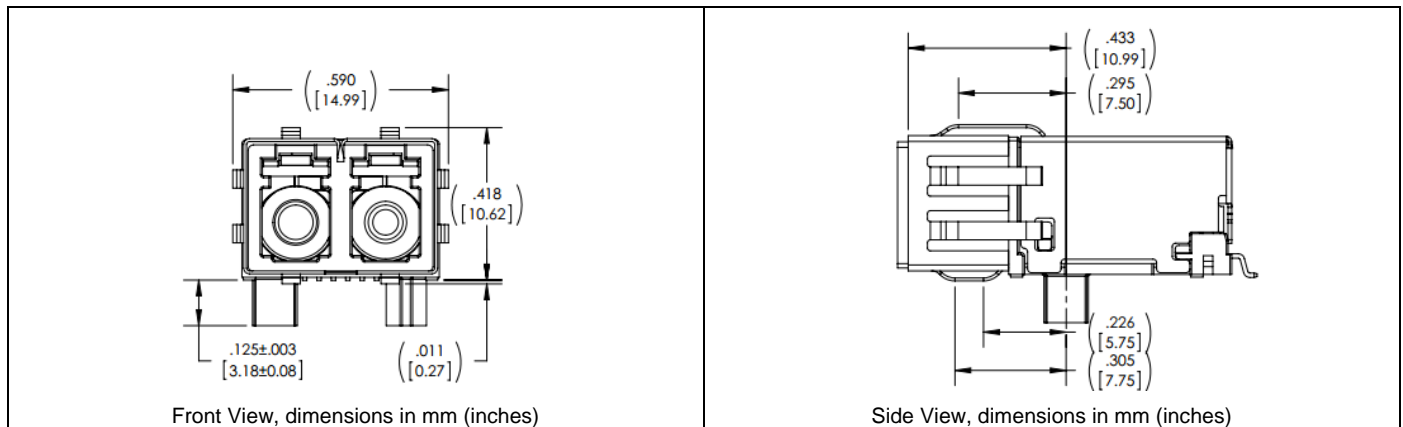

Mounting Hardware Guidelines

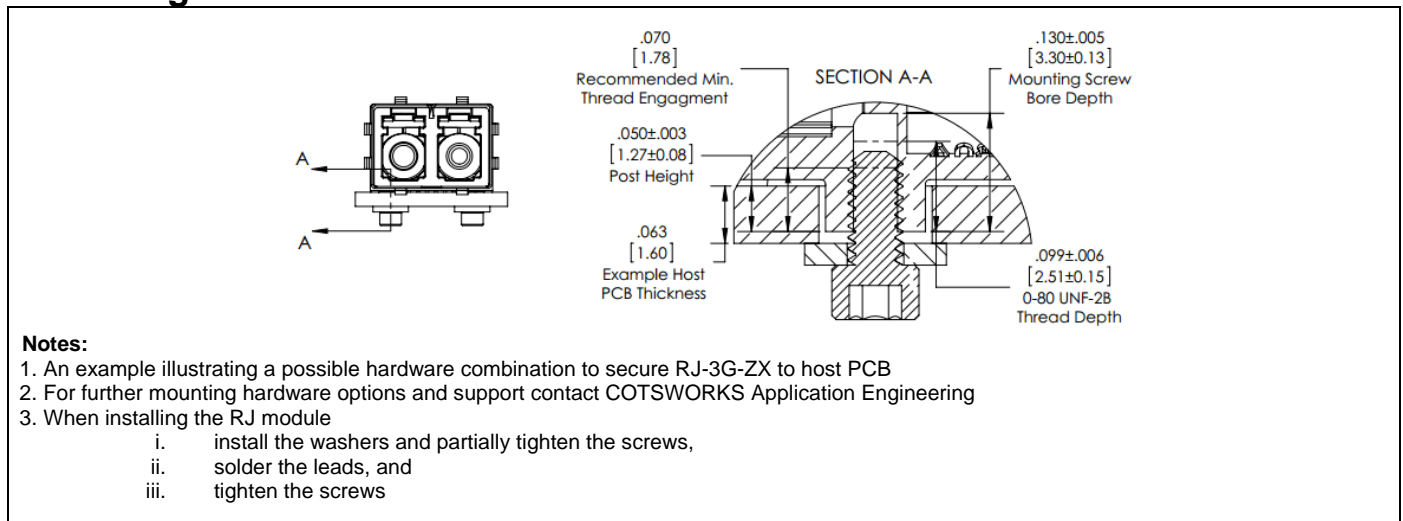

Ruggedization Notes

- Parylene Type C coating can be used with a 1.0 mil ± 0.2 mil thickness through a deposition process. Parylene C has a 5600 VPM rating, withstands high temperatures, and is extremely resistant to oil/dirt, and object impact.
- This part can come in a pigtail fiber optic version.
- Contact COTSWORKS for all MSDS, case composition, and burn analysis.

Reference Information

- 1) IEEE Standard 802.3, 2002 Edition, Clause 38, PMD Type 1000BASE-LX. IEEE Standards Department, 2002
- 2) "Fibre Channel Draft Physical Interface Specification (FC-PI-2 Rev. 10.0)". American National Standard for Information Systems
- 3) ARINC 818 specification at 1.0625 Gb/s, <http://www.arinc.com/>
- 4) Directive 2011/65/EU of the European Parliament and of the Council, "on the restriction of the use of certain hazardous substances in electrical and electronic equipment." June 8th, 2011

Regulatory Compliance

- COTSWORKS transceivers are Class 1 Laser Products and designed to comply with US FDA regulations.
- These products are designed to comply with Class 1 eye safety requirements of EN (IEC) 60825 and the electrical safety requirements of EN (IEC) 60950.
- This part has an option for compliance with Directive 2011/65/EU covering restriction on certain hazardous substances (RoHS)
 - Contact COTSWORKS support for a product compliance matrix

Warnings:

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Ordering Information

RJ-3G-ZX	-X-	DPLX	-LC-	x	-x-	x	-x-	x
RJ Form Factor	Pins and Diagnostics	Duplex		Ruggedized Coating	Operating Temp Range	EMI Shield	RoHS Level	Mounting
3Gbps Max Data Rate	(): 1x10	LC Connector		(): Non-coated	A: -40 to 85 °C	(): No Shield	(): Lvl 5	(): Imperial Screw
Very Long Reach (SMF)	No Diagnostics D: 1x12 Digital Diagnostics			R: Parylene		E: Shield	6: Lvl 6	U: Metric Screw P: Solder Posts

Example part number: RJ-3G-ZX-DPLX-LC-R-A

[3G RJ Transceiver, 1550nm, long-reach, Duplex LC connectors, Parylene-coated, -40 to 85 °C operating temp range, imperial-threaded screw posts]

COTSWORKS and the COTSWORKS logo are registered trademarks of COTSWORKS, LLC.
COTSWORKS reserves the right to change, alter, or revise this document without notice unless otherwise agreed to.